

# TOTO®


## CST744EL Eco Drake® Close Coupled Toilet, 1.28 GPF



CST744EL - Eco Drake® Close Coupled Toilet with SS114 - SoftClose Seat



**E-Max® Technology:** Quiet, powerful, commercial grade flushing performance.



**Choose a SoftClose® toilet seat, or upgrade to a Washlet.**



**Fast Flush:** New, wide 3" flush valve is 125% larger than conventional 2" flush valves.



- Contemporary, high profile design
- ADA Compliant
- E-Max® Technology
- Powerful, quiet flush every time
- Wide, 2-1/8" computer designed trapway
- Large water surface

High profile, ADA compliant close coupled toilet. Low consumption (1.28 Gpf/4.8 Lpf) siphon jet flushing action.

Tank cover, fittings, chrome plated trip lever, less seat.

■ **CST744EL**

Elongated, 12" rough-in, less seat

□ **C744EL**

Elongated bowl only, 12" rough-in.

□ **ST743E**

Drake tank and cover only. Complete with tank trim and coupling components.

□ **ST743ER**

Drake tank and cover only. Complete with tank trim and coupling components. Right hand trip lever.

□ **SS114**

SoftClose®: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

□ **SC134**

Elongated, open front seat with lid.

□ **SC534**

Elongated, open front seat less lid.

*Colors:*

*Standard* #01 Cotton, #11 Colonial White  
#12 Sedona Beige, #03 Bone  
#51 Ebony

*Trip Lever:*

*Standard* #CP Chrome Plated

*Optional* See price book for additional finishes

*TOTO USA, Inc. recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.*

 **ADA Compliant**

*For installation condition with approach from the left hand side.*

# CST744EL

## Eco Drake® Close Coupled Toilet, 1.28 GPF

### ■ PERFORMANCE

The TOTO® E-Max® low consumption toilets received high ratings during ANSI/ASME and CSA testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

### ■ SPECIFICATIONS

Water Use: 1.28 Gpf / 4.8 Lpf  
 Flush System: Gravity Feed (E-Max® System)  
 Min. Water Pressure: 8 psi  
 Water Surface: 10-3/8" x 8-1/4"  
 Trap Diameter: 2-1/8"  
 Rough-in: 12" rough-in  
 Trapseal: 2-3/8"  
 Acoustic Reading: 65-70dB (may vary depending on room construction)  
 Warranty: One Year Limited Warranty  
 Material: Vitreous china

Shipping Weight: **C744EL** 56.5 lbs.  
**ST743E** 35 lbs.

Shipping Dimensions: **C744EL** 29-1/2"L x 16"W<sup>1</sup>  
 x 10-1/4"W<sup>2</sup> x 18-1/2"H  
**ST743E** 20-1/8"L x 8-1/4"W  
 x 15-1/2"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 requirements.


Listing and approval: IAPMO/c-UPC, CSA, City of Los Angeles, State of MA, and others.



Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor. For installation condition with approach from the left hand side. Recommended seat: SS114

These dimensions and specifications are subject to change without notice.

U.S. Patent: D406.329 5.918.325  
 5.983.413 and pending

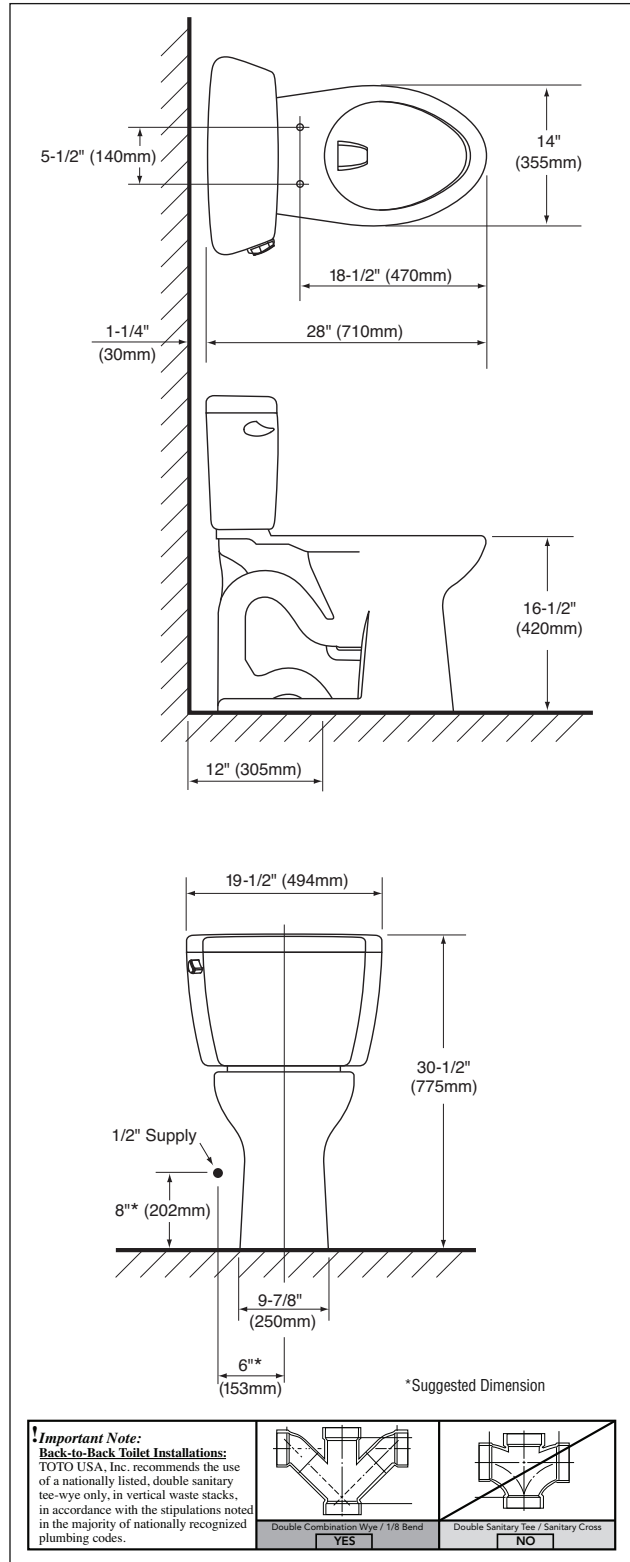

CST744EL - Eco Drake® Close Coupled Toilet

# TOTO®

TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260  
 Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com  
 Printed in U.S.A. © TOTO LTD. 03/07 #A10360

Printed on recycled paper

REV 03/09