

TOTO®

CT418FG

Aquia® Wall-Hung Dual-Flush Toilet, 1.6GPF & 0.8GPF

FEATURES

- Dual-flush flushing system, low consumption (1.6GPF/6.0LPF & 0.8GPF/3.0LPF)
- SanaGloss® ceramic glaze - prevents debris, mold from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning.
- Universal Height
- Wall-hung toilet can be paired with TOTO in-wall tank system as well as others

MODELS

- CT418FG
- SS204 SoftClose® seat (sold separately)
- SS164 SoftClose® seat (sold separately)

COLORS/FINISHES

- Standard
#01 Cotton

PRODUCT SPECIFICATION

This universal height, low consumption dual-max flushing system toilet shall be 1.6GPF & 0.8GPF. Toilet shall have optional SanaGloss ceramic glaze. Toilet shall be mounted to in-wall tank system, elongated front bowl and wall-mounted push-button type trip lever. Toilet shall be TOTO Model CT418FG_____.



SanaGloss

CODES/STANDARDS

- Meets or exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO (cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant
(center mount actuator/trip lever is approach side neutral*)
* consult with your local jurisdiction for special requirements





CT418FG

Aquia® Wall-Hung Dual-Flush Toilet, 1.6GPF & 0.8 GPF

SPECIFICATIONS

- Water Use 1.6 GPF & 0.8GPF (6.0 LPF & 3.0LPF)
- Flush System Dual-flush
- Min. Water Pressure 8 psi (static)
- Water Surface 5.5" X 4.75"
- Trap Diameter 2-1/8"
- Installation Height 15" to 19"
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight CT418FG - 66.5lbs
- Shipping Dimensions CT418FG
23-3/4" L X 15-3/4" W
X 17.5" H

INSTALLATION NOTES

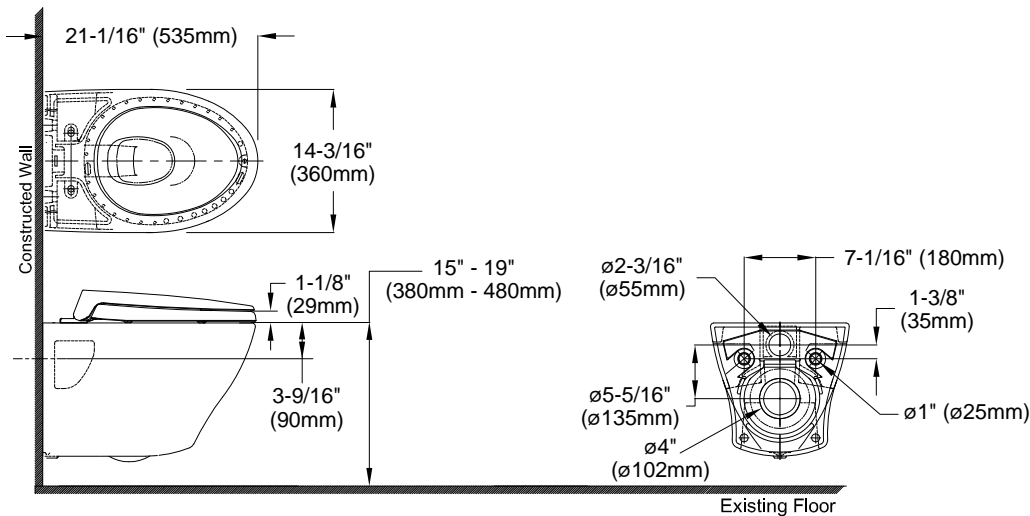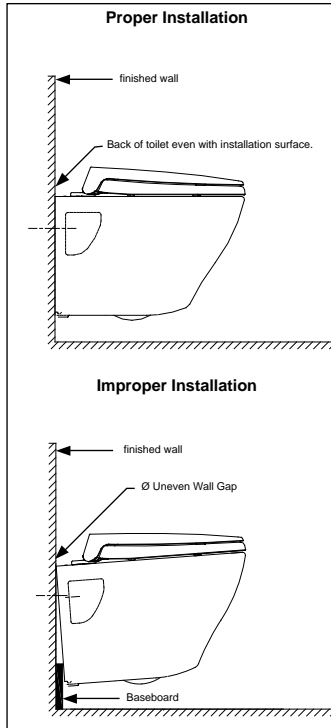

TOTO®

These dimensions and specifications are subject to change without notice