



WARNING

SHORTING THE VALVE TERMINALS OR B - B
TERMINALS WILL BURN - OUT THE TRANSFORMER

REV. 07-2000

AQUASTAT RELAY


TYPE L8148E

COMBINED CIRCULATOR LOAD

VOLTS A.C.	FULL LOAD	LOCKED ROTOR
120 V	7.4 A	44.4 A



BURNER LOAD: TERMINALS B1 B2
24 VAC .8 AMP. PILOT DUTY

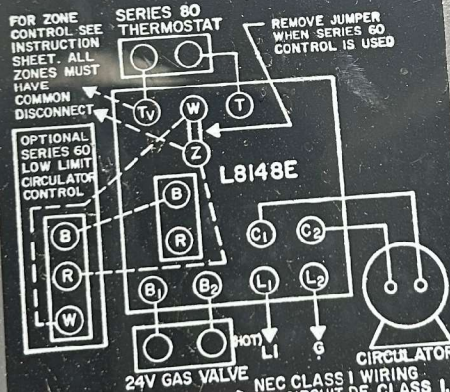

RECORDER UNIQUEMENT A UN CIRCUIT DE CLASS I.
NOTICE: CONNECTIONS TV - Z AND B1 - B2 ARE POWERED BY THE SAME TRANSFORMER. TOTAL LOAD SHALL NOT EXCEED 12 AMPS. FOR SUPPLY CONNECTIONS USE WIRE SUITABLE FOR AT LEAST 75°C (167°F) IN ELEVATED AMBIENTS TO 150°F. HOWEVER, 1.4 AMP LOAD CAN BE USED PROVIDING CONTROL AMBIENT DOES NOT EXCEED 77°F. IF MORE ZONE VALVES ARE NEEDED, USE AN AT - 72D TRANSFORMER.

HONEYWELL 1885 DOUGLAS DR.
MPLS., MINN. 55422

REV. 10/80