



CHAMPION™ RIGHT HEIGHT™ ELONGATED TOILET

2002.012

- Vitreous china
- Low-consumption (6.0 Lpf/1.6 gpf)
- 3" non-adjustable, flapper-free flush valve
- 16-1/2" rim height for accessible applications
- Elongated siphon action jetted bowl
- 2-3/8" fully-glazed trapway
- Speed Connect™ tank/bowl coupling system
- Sweeping pier on bowl
- 100% factory flush tested
- 2 bolt caps

3225.016 Bowl

4260.016 Tank


Nominal Dimensions:
30-3/8" x 19" x 34"
(772 x 483 x 864mm)

Fixture only, seat and supply by others

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M) for Vitreous China Fixtures - includes Flush Performance, Ball Pass Diameter, Trap Seal Depth and all Dimensions
- Los Angeles Department of Water and Power Supplementary Purchase Specification for Non-Adjustability - July, 2003 revision

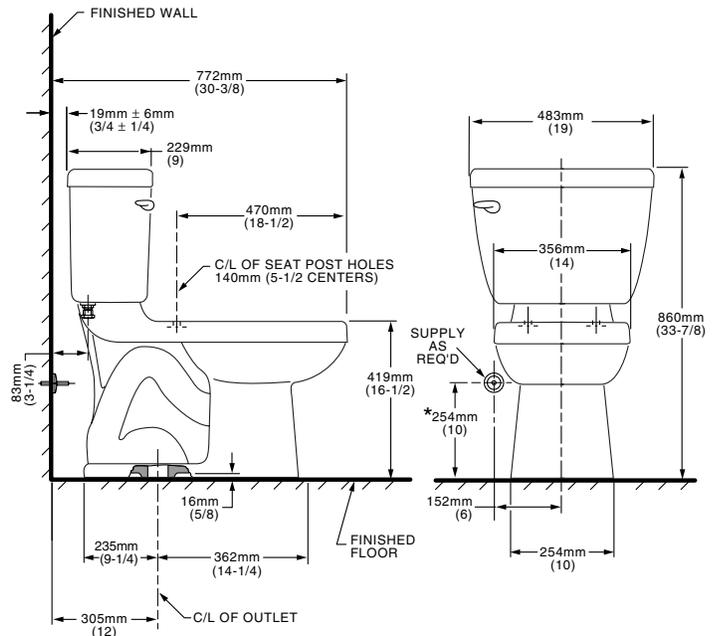

NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

To Be Specified

- Color: White
- Design matched Seat: #5280.016
- Alternate Seats:
 - Rise & Shine Elongated #5324.019
 - Rise & Shine Elongated - Open Front #5324.019
- Supply with stop:

America's BEST™
Flushing System



● When installed so top of seat is 432 to 483mm (17" to 19") from the finished floor.
MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USEABLE BUILDING FACILITIES-CHECK LOCAL CODES.