

TOTO®

CST754EF Eco Dartmouth® Close Coupled Toilet, 1.28 GPF



CST754EF - Eco Dartmouth® Close Coupled Toilet with SS154 - SoftClose® Traditional Seat

- Classic design, close coupled toilet
- Universal Height 16-1/8" rim height
- E-Max® Flushing Technology
- Powerful, quiet flush every time
- Large water surface
- Designer Suite:
Matching Dartmouth® pedestal and self-rimming lavatories

Decorative, ADA compliant, high profile close coupled toilet. Low consumption (1.28 Gpf/4.8 Lpf) siphon jet flushing action.

Tank cover, fittings, chrome plated trip lever, less seat.

■ **CST754EF**

Elongated, 12" rough-in, less seat

□ **C754EF**

Elongated bowl only, 12" rough-in.

□ **ST753E**

Dartmouth® tank and cover only. Complete with tank trim and coupling components.

□ **SS154**


SoftClose® Traditional: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.



E-Max® Technology: Quiet, powerful, commercial grade flushing performance.



Choose a SoftClose® toilet seat, or upgrade to a Washlet®.



Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.



Certified by IAPMO R&T

Colors:

*Standard #01 Cotton, #11 Colonial White
#12 Sedona Beige, #03 Bone
#51 Ebony*

Trip Lever:

*Standard #CP Chrome Plated
Optional See price book for additional finishes*

TOTO USA, Inc. recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



ADA Compliant

For installation condition with approach from the left hand side.

CST754EF

Eco Dartmouth® Close Coupled Toilet, 1.28 GPF

■ PERFORMANCE

The TOTO E-Max® low consumption toilets received high ratings during ANSI/ASME at independent laboratories.

Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

■ SPECIFICATIONS

Water Use: 1.28 Gpf / 4.8 Lpf
 Flush System: Gravity Feed (E-Max Technology)
 Min. Water Pressure: 8 psi
 Water Surface: 10-3/8" x 8-1/4"
 Trap Diameter: 2-1/8"
 Rough-in: 12" rough-in
 Trapseal: 2-3/8"
 Warranty: One Year Limited Warranty
 Material: Vitreous china

Shipping Weight: **C754EF** 56.5 lbs.
ST753E 39.5 lbs.

Shipping Dimensions: **C754EF** 29-1/8"L x
 11-7/8"W₁
 x 15" W₂ x
 17-3/8"H
ST753E 23-1/4"L x 9-5/8"W
 x 20-7/8"H


Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 requirements.

Listing / Approvals: shall be IAPMO/c-UPC certified. Shall be Watersense compliant.



Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor. For installation condition with approach from the left hand side. Recommended seat: SS154

These dimensions and specifications are subject to change without notice.

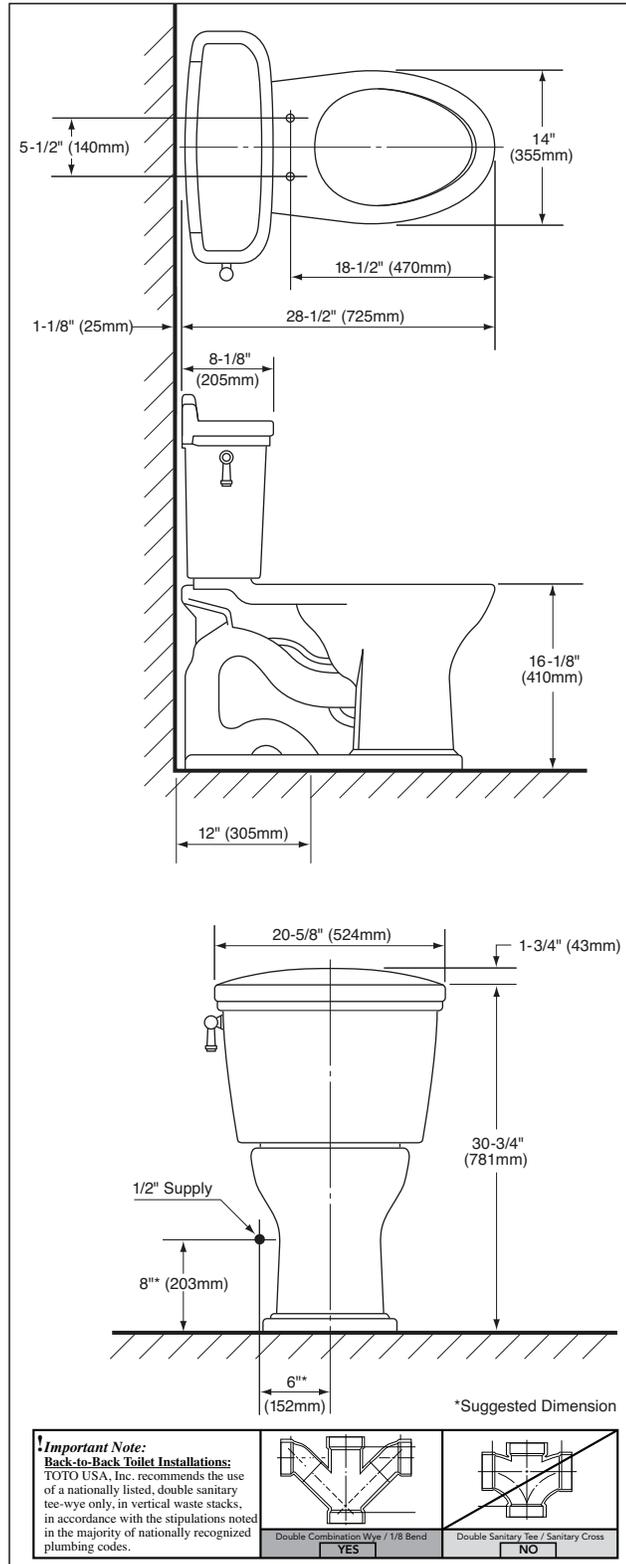

CST754EF - Eco Dartmouth® Close Coupled Toilet



TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com
 Printed in U.S.A. © TOTO U.S.A. 08/07 #A10410

Printed on recycled paper

REV 02/09