

TOTO®

CST784EF Eco Clayton® Close Coupled Toilet, 1.28 GPF



CST784EF - Eco Clayton® Toilet with SS154 - Traditional SoftClose Seat

- Traditional design, close coupled toilet.
- Universal Height 16-1/8" rim height.
- Wide 2-1/8" computer designed trapway
- E-Max® Flushing Technology
- Powerful, quiet flush every time
- Large water surface

High profile ADA compliant close coupled toilet with 12" rough-in. High efficiency (1.28Gpf/4.8Lpf) siphon jet flushing action.

Tank cover, fittings, color matched trip lever, less seat.

■ CST784EF

Elongated toilet, less seat. 12" rough-in.

□ C784EF

Elongated front Eco bowl only, 12" rough-in.

□ ST784E

Eco Clayton tank and cover only. Complete with tank trim and coupling components.

□ SS154

Traditional SoftClose Seat: Traditional styled seat and lid gently close with a touch of the hand. Elongated, closed front seat with lid.

□ SS114

Elongated closed front toilet seat and cover with SoftClose hinge system. Mounting hardware included.

Colors:

Standard #01 Cotton, #11 Colonial White
#12 Sedona Beige, #03 Bone
#51 Ebony

Trip Lever:

Standard Color Matched
Optional See price book for additional finishes

TOTO USA, Inc. recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

 ADA Compliant

For installation condition with approach from the left hand side.



E-Max® Technology: Quiet, powerful, commercial grade flushing performance.



Choose a SoftClose toilet seat, or upgrade to a Washlet.



Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.



CST784EF

Eco Clayton® Close Coupled Toilet, 1.28 GPF

■ PERFORMANCE

The TOTO E-Max® low consumption toilets received high ratings during ANSI/ASME at independent laboratories.

Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

■ SPECIFICATIONS

Water Use: 1.28 Gpf / 4.8 Lpf
 Flush System: Gravity Feed
(E-Max Technology)
 Min. Water Pressure: 8 psi
 Water Surface: 10-5/8" x 8-1/4"
 Trap Diameter: 2-1/8"
 Rough In: 12" rough in
 Trap Seal: 2-3/8"
 Warranty: One Year Limited Warranty
 Material: Vitreous china

Shipping Weight: **C784EF-Bowl**
 62 lbs.
ST784E-Tank
 36.5 lbs.

Shipping Dimensions: **C784EF-Bowl**
 30"L x 12-1/4"W¹
 x 14-5/8"W² x 18-1/8"H

ST784E-Tank
 22-1/8"L x 10"W
 x 17-3/4"H


Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 requirements.

Listing / Approvals: shall be IAPMO/c-UPC certified. Shall be Watersense compliant.



Meets the Americans with Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17" from the finished floor. For installation condition with approach from the left hand side. Recommended seat for ADA requirements: TOTO model #SS154.

These dimensions and specifications are subject to change without notice.

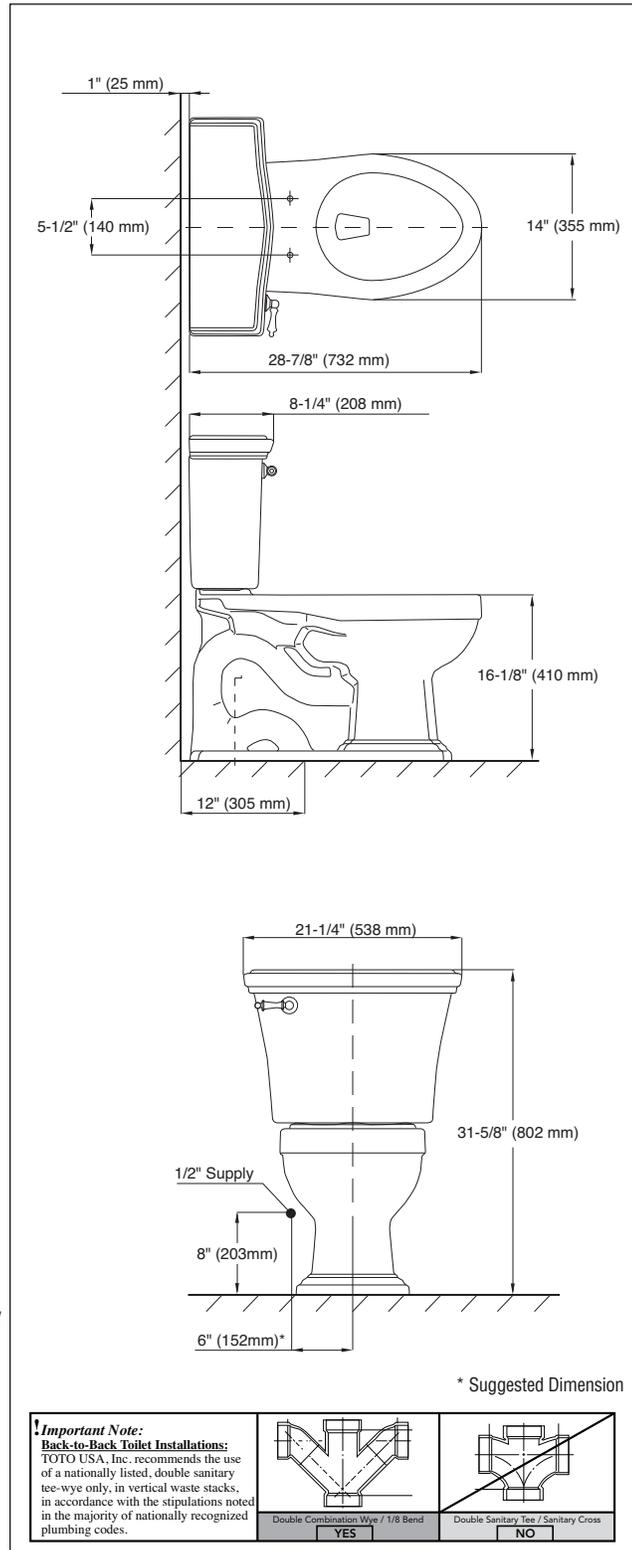

CST784EF - Eco Clayton® Close Coupled Toilet



TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com
 Printed in U.S.A. © TOTO LTD. 08/07 #A10420

Printed on recycled paper

REV 03/09