## TOTO<sub>®</sub>

# MS864114E / MS863113E

Eco Supreme® One Piece Toilet, 1.28 GPF



MS864114E / MS863113E - Eco Supreme® Toilet with SoftClose® Seat



E-Max® Technology: Quiet, powerful, commercial grade flushing performance.



Complete with SoftClose® toilet seat, or upgrade to a Washlet®.



Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.

- Elegant low profile one piece design
- E-Max<sup>®</sup> flushing system
- Wide, 2<sup>1</sup>/<sub>8</sub>" computer designed trapway
- Large water surface

Low profile one piece toilet. Low consumption (1.28Gpf/4.8Lpf/) siphon jet flushing action.

Tank cover, fittings, polished chrome trip lever, and SoftClose® seat included.

#### ■ MS864114E

Elongated toilet with SoftClose® seat

#### ■ MS863113E

Round toilet with SoftClose® seat

#### □ SS114

SoftClose® Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

#### □ SS113

SoftClose® Seat and lid gently close with a touch of a hand. Round, closed front seat with lid.

Colors:

#01 Cotton, #11 Colonial White #12 Sedona Beige, #03 Bone

Trip Lever:

Standard #CP Chrome Plated Optional See price book for additional finishes

TOTO USA, Inc. recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



ADA Compliant

For installation condition with approach from the left hand side.



### MS864114E / MS863113E

### Eco Supreme® One Piece Toilet, 1.28 GPF

#### **■ PERFORMANCE**

The TOTO® E-Max® low consumption one piece toilet received high ratings during ANSI/ASME testing at independent laboratories. Designed with a powerful siphon jet flushing action, the bowl offers a large water surface and a 100% glazed trapway.

#### **■ SPECIFICATIONS**

Water Use: 1.28 Gpf/4.8Lpf Flush System: Gravity Feed

(E-Max® Technology)

Min. Water Pressure:

8 psi (Static)

Water Surface: 10-5/16" x 8-1/4"

Trap Dia.: 2-1/8" Rough-in: 12" Trap Seal: 2-1/2"

Warranty: One Year Limited Warranty

Material: Vitreous China

Shipping Weight: MS864114E/MS863113E

97.5 lbs.

**Shipping Dimensions:** 

MS864114E/MS863113E

30-7/16"L x 18-13/16"W

x 23-15/16"H


Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

Listing / Approvals: c-UPC, City of Los Angeles, State of Massachusetts, and others. WaterSense compliant.



Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor. For installation condition with approach from the left hand side.

These dimensions and specifications are subject to change without notice.

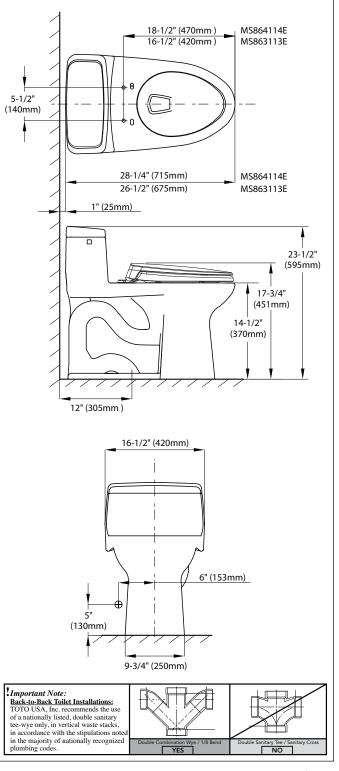

 $\textbf{MS864114E} \ / \ \textbf{MS863113E} \ \textbf{-Eco Supreme} \ \textbf{Toilet with SoftClose} \ \textbf{Seat}$ 



TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260 Tel. (888) 295-8134 • Fax. (770) 282-8701 • www.totousa.com Printed in U.S.A. © TOTO LTD. 03/07 #A10390